



Road barriers

BARRY



Barrier gate automation up to 6 m.

RELIABLE AND COMPLETE

Manufactured steel body with powder coated finish with LED lighting system and blinker warning light on board ensures the Barry is a complete system for all parking barrier needs.

Double limit switching (mechanical and electromagnetic) with balance spring system adjustable according to the length of the boom.

The Barry features hand grip handle for quick and easy manual release, protected by an access cover which is opened via cut key.



This model comes complete with telescopic boom, ideal to automate openings from 3 to 6 m.

Available versions: left and right hand opening, articulated boom system for parking areas or low ceilings.

Suitable for both residential and intensive use, it is available for 230V and 24V applications.

TECHNICAL FEATURES

	BARRY DC	BARRY
Power Supply	230V ~ 50Hz	230V ~ 50Hz
Motor Power Supply	24V dc	220V ac
Current	0,5 - 3,3A	0,7 - 1A
Motor Power	80W	90W
Class IP Protection	44	44
Opening Speed	3 - 6"	3 - 6"
Telescopic boom	3,6 - 6 m	3,6 - 6 m
Cycles/hour (max)	250	200
Duty Cycle	intensive use	intensive use

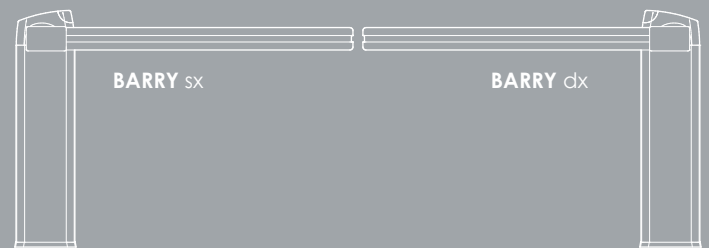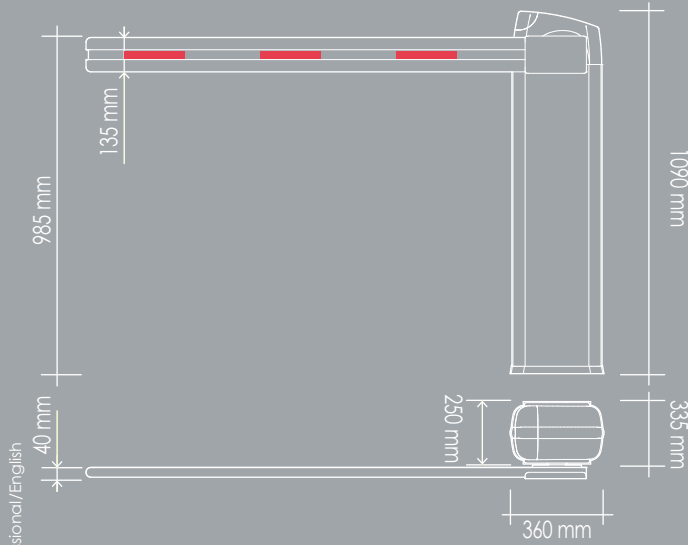


BARRYkit



Barrier automation with integrated control unit



Fixing ground plate



Telescopic boom

Accessories optional:



Articulated boom



Fixed support

